



Product code	Color
10231243	Silver

### General specifications

Product type	: Wall-bracket
Mounting type	: Wall - surface
Description	: It can be supplied with a shaped diaphragm for blade of light or with a lens with a 10° beam, to create cherming light effects of facades.
Indoor/outdoor lights	: Outdoor
Applications	: Arcades, Display areas, Façades of buildings, Shopping centres, Walkways

### Lighting specifications

Lamps description	: 2 LED 100lm 1,5W 3500K
Color temperature (K)	: 3500
Number of lamps	: 2
Average lamp life (h)	: 50.000

### Physical specifications

Body	: Die-cast aluminium
Finishes	: Metal paint with a special anti-oxidising treatment
Closing Screen	: Tempered 3mm, shockproof and heat resistant
Frame	: Die-cast aluminium
Gaskets	: Silicone
Screws	: Stainless steel

### Electrical specifications




Driver availability	: Included
Driver mounting	: Integrated
Cable gland	: M12x1, 5 in nickel-plated brass
Voltage (V)	: 230/240
Frequency (Hz)	: 50/60

### Weight and dimensions

Length (mm)	: 125
Width (mm)	: 90
Weight (Kg)	: 1

### Optical specifications

Aiming	: Fixed
Light distribution	: Symmetric
Light emission	: Bi-directional
Light beam (°)	: 60/60

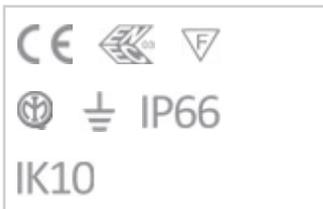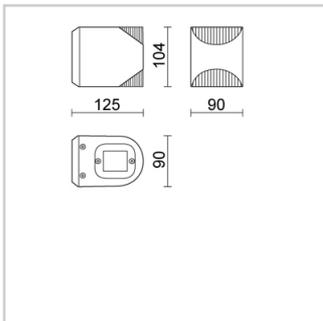


## Accessories

28-3099-85 Shaped diaphragm  
28-9000-10 Lens for 10° beam

Lamps	Categories	Type	Wattage (W)	Nominal lumens on thermal regime	Color Temp. (K)	CRI
	LED	LED	2x 1.5	2x 100	3500	>80

## Photometrics

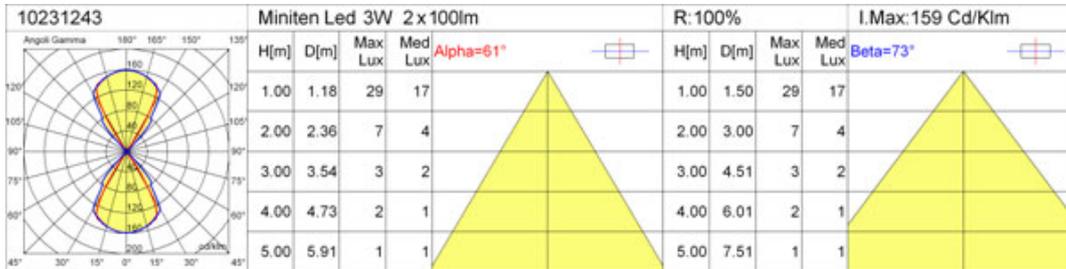

## Pictures and Applications

